





Fabricated Fittings Technical
Bolted Compression Couplings - PIP

Zinc Plated Bolt Pack w/ Galvanized Flanges or
 Stainless Steel w/ Stainless Flanges

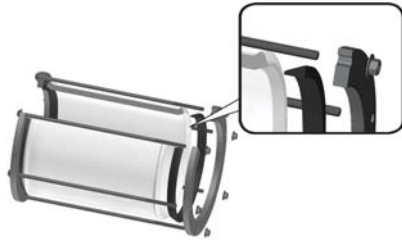

Bolt Tightening Sequence
 Recommended Torque to Seal: 12-15 ft-lb

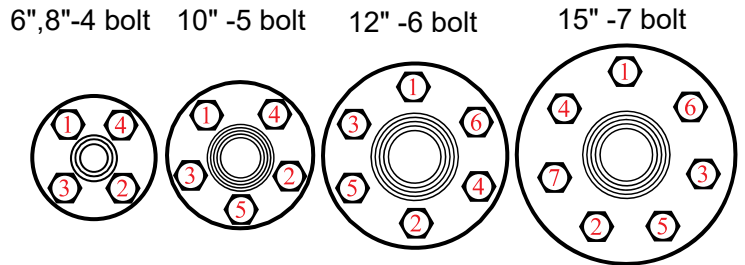


PIP (Plastic Irrigation Pipe)
 100 psi rated

SBR Gasket
 (BUNA-S)

6" - 15" diameter
 12" or 18" length

**Bolted Compression Coupling -
 12" Length**


Bolted Compression x Bolted Compression

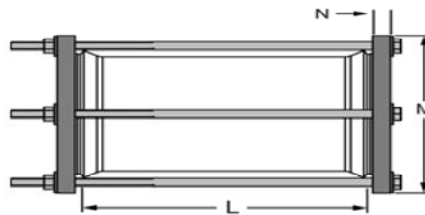

Part Number		Size	L	M	N	Approx. Wt. (Lbs.)
ZINC	SS316					
3028B-060X12	3028B-060X12S	6	12	10-1/8	5/16	12.44
3028B-080X12	3028B-080X12S	8	12	12-1/8	5/16	16.18
3028B-100X12	3028B-100X12S	10	12	14-3/16	3/8	16.29
3028B-120X12	3028B-120X12S	12	12	16-3/8	3/8	20.07
3028B-150X12	3028B-150X12S	15	12	19	3/8	41.07

**Bolted Compression Coupling -
 18" Length**

Bolted Compression x Bolted Compression

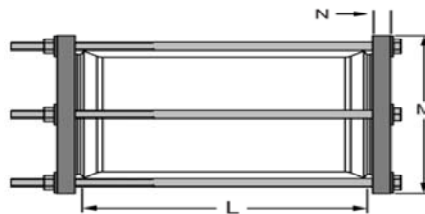

Part Number		Size	L	M	N	Approx. Wt. (Lbs.)
ZINC	SS316					
3028B-060X18	3028B-060X18S	6	18	10-1/8	5/16	14.86
3028B-080X18	3028B-080X18S	8	18	12-1/8	5/16	19.38
3028B-100X18	3028B-100X18S	10	18	14-3/16	3/8	27.31
3028B-120X18	3028B-120X18S	12	18	16-3/8	3/8	27.09
3028B-150X18	3028B-150X18S	15	18	19	3/8	49.11