

LabWaste® Technical

Neutralization Tanks

Standard HDPE Round Neutralization/Dilution Tanks

Construction: HDPE - High Density Polyethylene

Tank Capacity US Gallons	Approx. Useable Capacity, US Gallons		Inside Dimension Dia x	Wall Thickness	Approx. Weight	Standard Inlet & Outlet Connection Size	Standard Fitting	LabWaste® Transition Connection Fitting	Optional Vent Connection	Approx. Centerline Height (in.)		
	Without Liimestone	With Limestone	Ht. (in.)	(in.)	(lbs.)	(in.)	Connection	Connection Fitting	Size (in.)	Inlet	Outlet	Vent
5	3	1	11 x 14	3/16	10	1-1/2 or 2	Mipt	P101	1-1/2 or 2	11	8	12
15	7	2	18 x 15	3/16	20	1-1/2 or 2	Mipt	P101	1-1/2 or 2	11	8	12
30	19	6	18 x 29	3/16	35	3	Mipt	P101	2 or 3	23	19	25
55	35	12	22 x 36	3/16	50	4	Mipt	P101	3 or 4	27	23	31
100	77	26	28 x 42	1/4	85	4	Mipt	P101	3 or 4	35	31	37
150	105	35	31 x 48	1/4	100	4	Mipt	P101	3 or 4	38	34	42
175	135	45	30 x 60	1/4	125	4	Mipt	P101	3 or 4	51	47	54
200	137	46	36 x 48	1/4	125	4 or 6	Mipt/Flange	P101/854	4 or 6	38	34	42
275	186	62	42 x 48	1/4	160	4 or 6	Mipt/Flange	P101/854	4 or 6	38	34	42
300	230	76	36 x 74	5/16	175	4 or 6	Mipt/Flange	P101/854	4 or 6	61	56	65
350	243	81	48 x 48	5/16	200	4 or 6	Mipt/Flange	P101/854	4 or 6	38	34	42
500	395	132	52 x 60	3/8	225	4 or 6	Mipt/Flange	P101/854	4 or 6	51	47	54
550	447	149	48 x 72	3/8	275	4 or 6	Mipt/Flange	P101/854	4 or 6	64	60	67
650	548	183	48 x 84	3/8	375	4 or 6	Mipt/Flange	P101/854	4 or 6	75	71	76
1200	1052	351	69 x 84	3/8	600	4 or 6	Mipt/Flange	P101/854	4 or 6	74	68	76
2000¹	1559	521	84 x 84	1/2	850	4 or 6	Mipt/Flange	P101/854	4 or 6	74	68	76
3000¹	2203	735	95 x 97	1/2	1350	4 or 6	Mipt/Flange	P101/854	4 or 6	87	83	91

Standard CPVC Round Neutralization/Dilution Tanks

Construction: Chlorinated Polyvinyl Chloride (CPVC)


Tank Capacity US Gallons	Approx. Useable Capacity, US Gallons		Inside Dimension Dia. x Ht. (in.)	Wall Thickness	Approx. Weight	X. ()LITIQT	Standard Fitting	LabWaste® Transition Connection Fitting³	Optional ⁴ Vent Connection	Approx. Centerline Height (in.) ⁵		
	Without Limestone	With Limestone	,	(in.)	(lbs.)	(in.)	Connection	Connection Fitting	Size (in.)	Inlet	Outlet	Vent
5	5	3	12-3/8 x 15-1/2	3/16	20	1-1/2 or 2	Socket	Direct	1-1/2 or 2	11	8	12
15	15	7	17-11/16 x 17-1/4	3/16	35	1-1/2 or 2	Socket	Direct	1-1/2 or 2	11	8	12
30	30	18	17-5/8 x 33	3/16	54	3	Socket	Direct	2 or 3	23	18	25
55	55	35	23-1/2 x 38-1/2	1/4	70	4	Socket	Direct	3 or 4	27	23	31

Important Notes

- 1. Larger HDPE tanks may include exterior steel banding or fiberglass reinforcement for additional strength. Special ordered optional inspection manhole ports are recommended for larger tanks (includes cover with neoprene gasket, stainless steel nuts, bolts, and washers).
- 2. All tanks can be special ordered with Mipt, Flanged (CL150), and Fipt connections or varying combinations other than standard connections specified. Inlets or vents may also be custom ordered for installation in covers instead of tank sides.
- 3. For transitions from Mipt HDPE tank connections to LabWaste® piping, use part numbers P101-xxxC, Female Adapter. CPVC tank sockets can be cemented directly to LabWaste® piping. For transitions from ALL flanged connections to LabWaste® piping, use part numbers 854-xxxC, Flange (xxx = size code).
- 4. Venting is required by codes but may be accomplished either at the tank or in-line.
- 5. Neutralization tanks and tank extensions are not warranted for direct burial applications. Tanks must be properly placed and secured with no applied stresses, within a dry concrete vault with use of a protective traffic cover as deemed appropriate. However, if direct burial is used without warranty, custom centerlines must be furnished from top of cover down to fitting centerline instead of specified tank bottom to fitting centerline since tank heights can vary.

LabWaste® Technical Neutralization Tanks



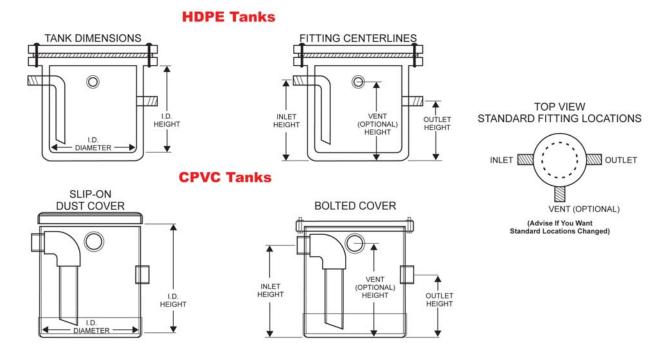

1-Gallon CPVC Dilution Tanks

Provides chemical dilution from water rinse during use. Designed for under-sink installations. CPVC construction with Glass or PP Jar type tank.



