



## GripLoc™ Compression Couplings



### GripLoc™ Compression Coupling

Tightening nut compresses special stainless steel Gripper Ring to firmly grip pipe and prevent potential pull-out. Compressed Gland Ring ensures positive O-ring seal against pipe.

### GripLoc™ Compression Couplings


WARNING: DO NOT INSERT FINGERS

For Cold Water Only - EPDM Gasket

1/2" - 2" Pressure Rated to 235 psi

3" - 4" Pressure Rated to 150 psi

Hand Tighten ONLY - No Nut Wrenches Required

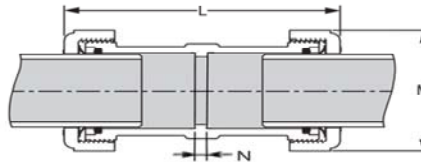

Part Number	Size	L	M	N	Approx. Wt. (Lbs.)
S112-05	1/2	4-13/16	1-13/16	1/8	.19
S112-07	3/4	5-1/8	2-1/8	1/8	.31
S112-10	1	5-7/16	2-1/2	1/8	.45
S112-12	1-1/4	6	2-15/16	1/8	.55
S112-15	1-1/2	6-11/16	3-5/16	1/8	.90
S112-20	2	7-5/16	3-7/8	1/8	1.30
S112-30	3	8-11/16	5-1/2	3/16	3.09
S112-40	4	11	6-11/16	3/16	5.86