




**EverTUFF® TURF™ PVC Repair
 Coupling -
 Spigot x Socket**

Class 315 Pressure Rating

EPDM O-rings
 Can be used as a short-stroke
 Expansion Joint




Part Number	Size	L	L2	L3	M	T	Approx. Wt. (Lbs.)
S118-10T	1	15/16	8-1/2	7-9/16	2-1/16	4-1/16	.62
S118-12T	1-1/4	1	8-13/16	7-13/16	2-7/16	4-1/16	.87
S118-15T	1-1/2	1-1/8	9-3/16	8-1/16	2-11/16	3-13/16	1.02
S118-20T	2	1-3/16	9-15/16	8-3/4	3-1/4	4-5/16	1.59
S118-25T	2-1/2	1-3/4	13-5/8	11-7/8	3-15/16	5-9/16	3.44
S118-30T	3	1-7/8	13-11/16	11-13/16	4-5/8	5-9/16	4.29
S118-40T	4	2-1/4	14-13/16	12-9/16	5-3/4	6-3/16	6.84
S118-60T	6	3	17-3/16	14-3/16	8-7/16	6-5/8	14.62

Unit Must Be Thrust Blocked

**EverTUFF® TURF™ PVC Repair
 Coupling -
 Socket x Socket**

Class 315 Pressure Rating

EPDM O-rings
 Can be used as a short-stroke
 Expansion Joint



Part Number	Size	L	L1	L2	L3	M	T	Approx. Wt. (Lbs.)
S119-10T	1	15/16	1-1/8	9-11/16	7-5/8	2-1/16	4-1/16	.71
S119-12T	1-1/4	1	1-1/4	10-3/16	7-15/16	2-7/16	4-1/16	1.01
S119-15T	1-1/2	1-1/8	1-3/8	10-11/16	8-3/16	2-11/16	3-13/16	1.16
S119-20T	2	1-3/16	1-1/2	11-5/8	8-15/16	3-1/4	4-5/16	1.81
S119-25T	2-1/2	1-3/4	1-3/4	15-9/16	12-1/16	3-15/16	5-9/16	3.82
S119-30T	3	1-7/8	1-7/8	15-3/4	12	4-5/8	5-9/16	5.37
S119-40T	4	2-1/4	2-1/4	17-1/4	12-3/4	5-3/4	6-3/16	7.71
S119-60T	6	3	3	20-1/2	14-1/2	8-7/16	6-5/8	17.64

Unit Must Be Thrust Blocked






Irrigation & Turf Technical
EverTUFF® TURF™ Repair & GripLoc™ Fittings

**EverTUFF® TURF™ PVC Repair
 Coupling - Short, Spigot x
 Socket**

Class 315 Pressure Rating




EPDM O-ring

Part Number	Size	L	L2	L3	M	T	Approx. Wt. (Lbs.)
SH118-10T	1	15/16	5-3/4	4-13/16	2-1/16	2	.42
SH118-12T	1-1/4	1	6-5/8	5-5/8	2-7/16	2-1/2	.60
SH118-15T	1-1/2	1-1/8	6-15/16	5-13/16	2-11/16	2-1/2	.76
SH118-20T	2	1-3/16	8-5/16	7-1/8	3-1/4	3	1.19

Unit Must Be Thrust Blocked

**EverTUFF® TURF™ PVC Repair
 Coupling - Short, Socket x
 Socket**

Class 315 Pressure Rating




EPDM O-ring

Part Number	Size	L	L1	L2	L3	M	T	Approx. Wt. (Lbs.)
SH119-10T	1	15/16	1-1/8	7	4-15/16	2-1/16	2	.51
SH119-12T	1-1/4	1	1-1/4	8	5-3/4	2-7/16	2-1/2	.74
SH119-15T	1-1/2	1-1/8	1-3/8	8-3/8	5-7/8	2-11/16	2-1/2	.90
SH119-20T	2	1-3/16	1-1/2	10	7-5/16	3-1/4	3	1.41

Unit Must Be Thrust Blocked



GripLoc™ Compression Couplings

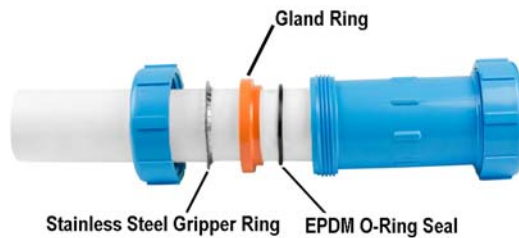


GripLoc™ Compression Coupling

Tightening nut compresses special stainless steel Gripper Ring to firmly grip pipe and prevent potential pull-out. Compressed Gland Ring ensures positive O-ring seal against pipe.

EverTUFF® TURF™ GripLoc™ Compression Coupling

WARNING: DO NOT INSERT FINGERS
 For Cold Water Only - EPDM Gasket - Class 315
 Hand Tighten ONLY - No Nut Wrenches
 Required

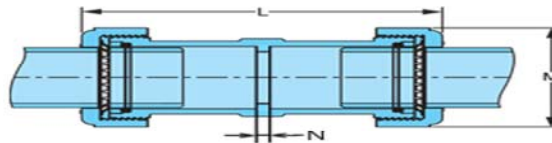

Part Number	Size	L	M	N	Approx. Wt. (Lbs.)
S112-10T	1	5-7/16	2-1/2	1/8	.35
S112-15T	1-1/2	6-11/16	3-5/16	1/8	.90
S112-20T	2	7-5/16	3-7/8	1/8	1.30
S112-30T	3	8-11/16	5-1/2	3/16	3.09
S112-40T	4	11	6-11/16	3/16	5.82